


COMPACT MANHOLE COVER LIFT

ATM-116120


MANHOLE COVER LIFTER INSTRUCTIONS (116/120)

STEP 1
PLACE LIFTER WITH TEE
HOOK (CLEVIS) IN
KEYHOLE AS SHOWN


STEP 2
ROTATE LIFTER SO THAT THE TEE
HOOK IS AT RIGHT ANGLES INSIDE
THE KEYHOLE

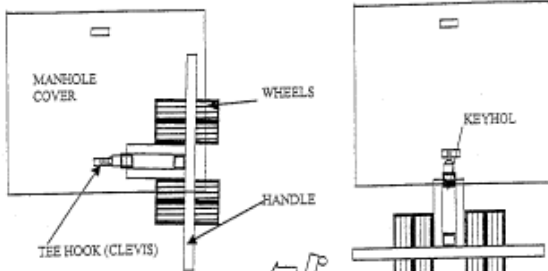

STEP 3
PULL HANDLE IN
DIRECTION
SHOWN TO BREAK
THE SEAL AND
PICK UP COVER.



STEP 4
CONTINUE TO PULL HANDLE BACK
& DOWN WARDS UNTIL COVER IS
LIFTED AND TRANSPORTABLE TO A
SAFE LOCATION.



ADJUSTMENT OF THE HOOK (CLEVIS)

Position A—Above the surrounding ground level.
Position B—At ground level.

Position B1 & B2—Below the surrounding ground level.

